

Batyline Lounge








- Simple elegance: subtle colors with sophisticated depth.
- Safe & durable: phthalate free, GreenGuard certified, high resistance to outdoor conditions, fire resistant.
- **Easy:** dries quickly, easy to clean.

Batyline performance with simple elegance





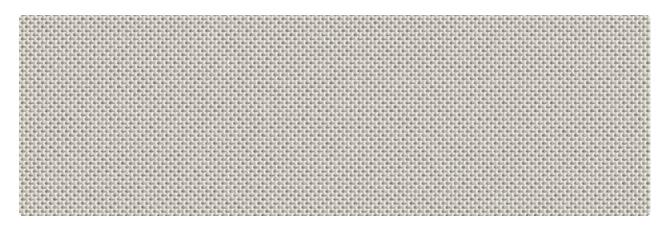

Quartz 7720FR-50932



Purple 7720FR-5708*

Abyss 7720FR-50935*

Dark alu 7720FR-5706*

Waterproof version also available, please ask us for more information.

* Check for availability

Batyline is a registered trademark of Serge Ferrari Group Ref. CT-01030 • JUNE 2022/V1

Batyline Lounge

7720FR 7721FR WP

	■Technical properties		Standards
Weight	14.8 oz/sqyd (500 g/m2) 15.5 c	oz/sqyd (525 g/m2)	EN ISO 2286-2
Width	55.1 in (140 cm)		
	Physical properties		
Abrasion resistance*	600,000 double rubs - Heavy Duty		ASTM D4157 Wyzenbeek
Tensile strength (warp/weft)	150 / 150 daN/5cm		EN ISO 1421
Tear strength (warp/weft)	18/15 daN		DIN 53.363
Light stability	GS=4 at 700 hrs		ASTM G154: UVA340
Colorfastness to light	4/5 >1000 hrs		ASTM 4329
Mold resistance	Method A, degree 0, excellent		ISO 846-A
Extreme working temperatures	-22°F/+158°F		
	■ Flame retardancy		
United States	Pass		CALTB 117
Marine test	Pass		IMO MSC.307 (88) (2010 FTP Code) Annex 1 part 8
	Management systems		
Quality			ISO 9001
Environment			ISO 14001
	Certification, labels, warranty		
	5 year warran		Smart Yarn
	■Tools and services		

- Tools and services
- Fabrication guide & cleaning instructions available upon request
- Visualize & play with custom colors and weaves with Serge Ferrari's Penelope Software.

 $Quoted \ technical \ characteristics \ are \ average \ values \ with \ a+/-5\% \ tolerance. Our \ products \ are \ subject to \ improvements \ resulting \ from \ technical \ developments \ and \ we$ $reserve the {\it right} to {\it modify} their characteristics at any time. The purchaser of our products is responsible for checking the above data.$





^{*}Multiple factors affect coated fabric durability and appearance retention, including end-user application and proper maintenance. Wyzenbeek results above 100,000 double rubs have not been shown to be a reliable indicator of increased coated fabric lifespan.